



MDT 269 J12




Potain Plus Power Control

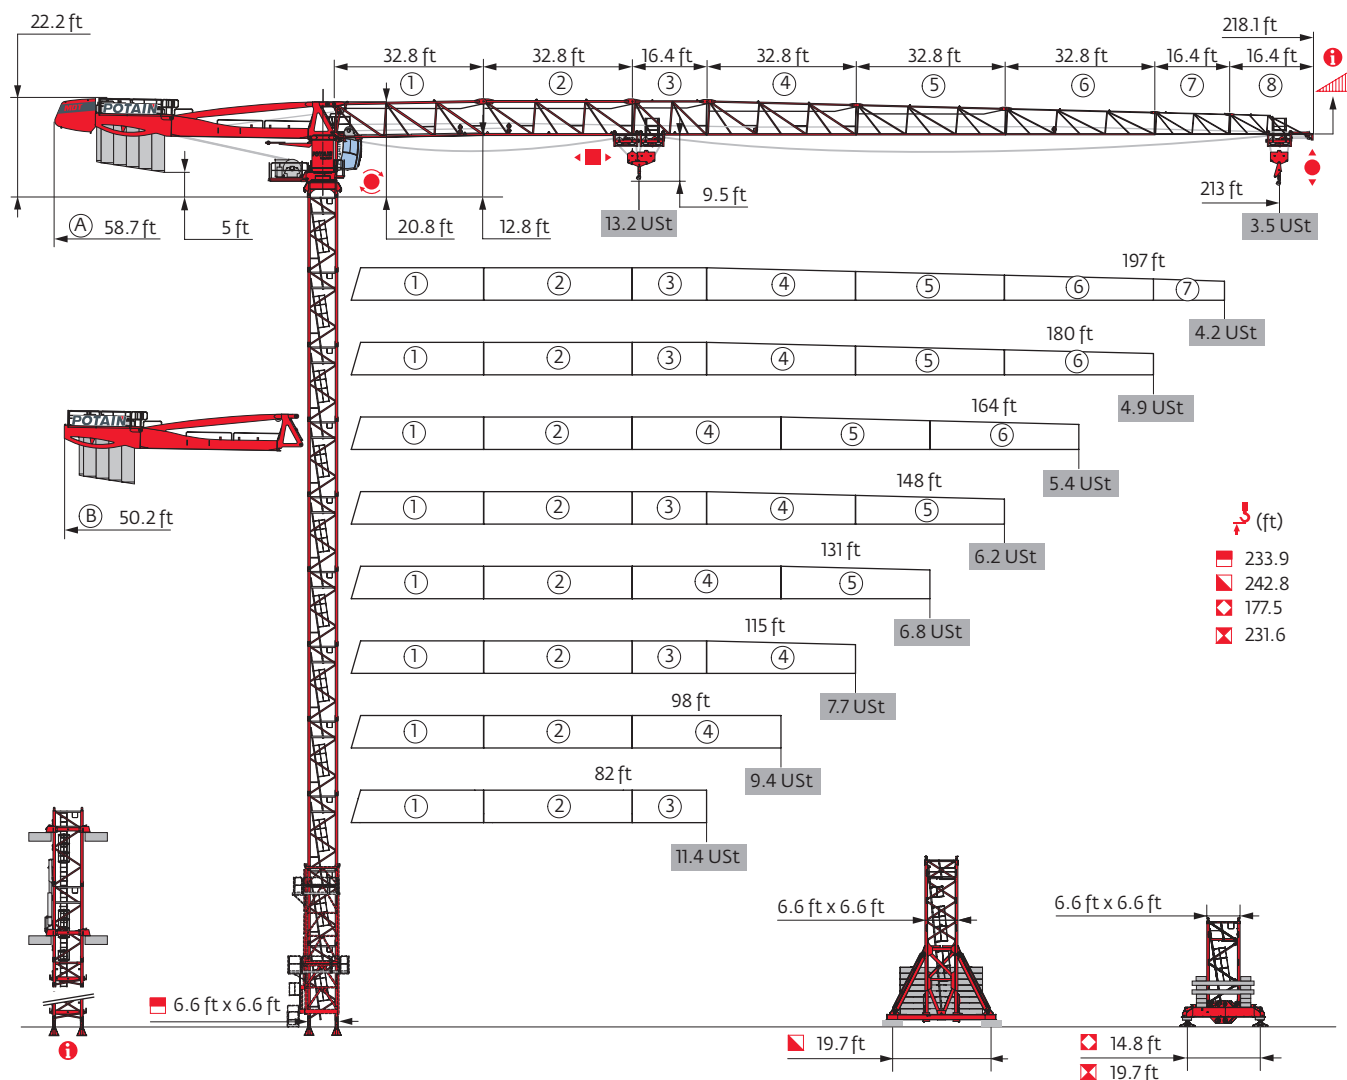




Top Site










Top Tracing 3









Mast - Reactions



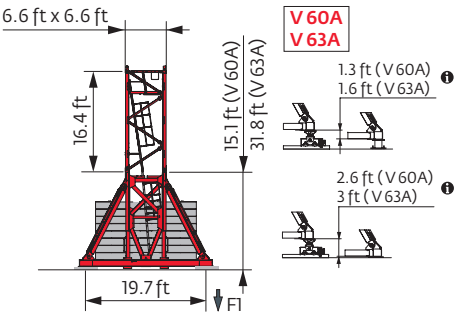

6.6 ft - P 602B									
AVAIL (ft)	82	98	115	131	148	164	180	197	213
 (ft)	233.9	233.9	233.9	233.9	228.7	228.7	217.5	217.5	217.5
 / P+ (ft)	233.9	233.9	233.9	233.9	228.7	228.7	217.5	217.5	217.5
	10.9 ft	0	0	0	1	1	0	0	0
	16.4 ft	14	14	14	13	13	13	13	13
F2 (USt)	● 206	203	207	204	199	200	199	201	202
	■ 335	334	340	337	330	331	299	298	305
F3 (USt)	● 148	145	147	143	138	138	137	137	139
	■ 284	283	286	283	275	276	243	241	248


6.6 ft - V 60A - 									
AVAIL (ft)	82	98	115	131	148	164	180	197	213
 (ft)	215.2	215.2	215.2	215.2	215.2	215.2	220.8	215.2	215.2
 / P+ (ft)	215.2	215.2	215.2	215.2	215.2	215.2	220.8	215.2	215.2
	10.9 ft	0	0	0	0	0	2	0	0
	16.4 ft	12	12	12	12	12	11	12	12
F1 (USt)	● 114	113	115	114	115	115	121	116	120
	■ 147	146	149	147	150	151	158	148	153

6.6 ft - V 63A - 									
AVAIL (ft)	82	98	115	131	148	164	180	197	213
 (ft)	237.2	237.2	237.2	242.8	237.2	237.2	231.6	231.6	231.6
 / P+ (ft)	237.2	237.2	237.2	242.8	237.2	237.2	231.6	231.6	231.6
	10.9 ft	2	2	2	1	2	2	0	0
	16.4 ft	11	11	11	12	11	11	12	12
F1 (USt)	● 135	134	136	137	136	136	131	132	133
	■ 184	183	187	193	189	189	177	176	180



6.6 ft - ZD 463 - 									
W (ft)	82	98	115	131	148	164	180	197	213
 (ft)	171.9	177.5	171.9	177.5	171.9	171.9	166.3	166.3	166.3
 / P+ (ft)	171.9	171.9	171.9	177.5	171.9	171.9	161.1	161.1	161.1
	10.9 ft	0	2	0	2	0	0	1	1
	16.4 ft	10	9	10	9	10	10	9	9
FI (USt)	● 113	115	114	115	111	111	115	115	116
	■ 125	134	127	134	128	129	120	119	124

6.6 ft - ZX 6830 - 									
W (ft)	82	98	115	131	148	164	180	197	213
 (ft)	231.6	231.6	226	226	226	226	215.2	209.6	209.6
 / P+ (ft)	231.6	231.6	226	226	226	226	215.2	209.6	209.6
	10.9 ft	1	1	2	2	2	1	2	2
	16.4 ft	13	13	12	12	12	12	11	11
FI (USt)	● 128	128	125	121	125	125	117	113	113
	■ 172	171	166	164	168	169	149	141	145

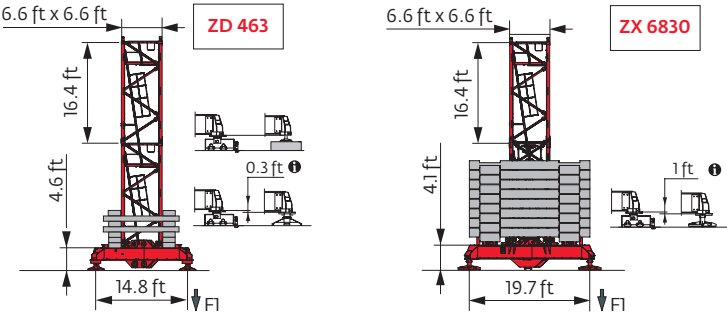







Note: When "ASCE" is noted in this data sheet it is referring to 115 mph Wind Zone, Exposure B, Design Wind Speed = 98 mph. See back cover for design wind speed calculations.




Anchorage






Base ballast

 (Ust) /  6.6 ft - V 60A - 										
ft	82	98	115	131	148	164	180	197	213	
220.8	145.5									
215.2	145.5	145.5	145.5	145.5	145.5	145.5	132.3	132.3	145.5	
198.8	119.1	119.1	119.1	105.8	105.8	119.1	105.8	105.8	105.8	
182.4	92.6	92.6	92.6	79.4	79.4	79.4	92.6	92.6	92.6	
166	79.4	79.4	79.4	66.1	66.1	66.1	79.4	79.4	79.4	
149.6	66.1	66.1	66.1	52.9	52.9	52.9	66.1	66.1	66.1	
133.2	52.9	52.9	52.9	52.9	39.7	39.7	52.9	52.9	52.9	
116.8	52.9	52.9	52.9	52.9	39.7	39.7	39.7	39.7	39.7	
100.4	52.9	52.9	52.9	52.9	39.7	39.7	39.7	26.5	26.5	
84	52.9	52.9	52.9	52.9	39.7	39.7	39.7	26.5	26.5	
67.6	52.9	52.9	52.9	52.9	39.7	39.7	39.7	26.5	26.5	

 (Ust) /  6.6 ft - V 63A - 										
ft	82	98	115	131	148	164	180	197	213	
242.8	198.4									
237.2	198.4	198.4	198.4	198.4	198.4	198.4				
231.6	185.2	185.2	185.2	185.2	185.2	185.2	172	172	172	
215.2	145.5	145.5	145.5	145.5	145.5	145.5	145.5	132.3	145.5	
198.8	119.1	119.1	119.1	119.1	119.1	119.1	105.8	119.1	119.1	
182.4	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	
166	79.4	79.4	79.4	66.1	66.1	66.1	79.4	79.4	79.4	
149.6	66.1	66.1	66.1	52.9	52.9	52.9	66.1	66.1	66.1	
133.2	52.9	52.9	52.9	39.7	39.7	39.7	52.9	52.9	52.9	
116.8	39.7	39.7	39.7	39.7	39.7	39.7	39.7	39.7	39.7	
100.4	39.7	39.7	39.7	39.7	39.7	39.7	39.7	26.5	26.5	
84	39.7	39.7	39.7	39.7	39.7	39.7	39.7	26.5	26.5	
67.6	39.7	39.7	39.7	39.7	39.7	39.7	39.7	26.5	26.5	

 (Ust) /  6.6 ft - ZD 463 - 										
ft	82	98	115	131	148	164	180	197	213	
177.5	137.8									
171.9	132.3	126.8	132.3	126.8	121.3	121.3				
166.3	126.8	121.3	126.8	121.3	115.7	115.7	132.3	132.3	132.3	
149.9	104.7	104.7	104.7	99.2	93.7	93.7	110.2	110.2	110.2	
133.5	88.2	88.2	82.7	82.7	82.7	82.7	88.2	93.7	88.2	
117.1	88.2	88.2	82.7	82.7	82.7	82.7	77.2	71.7	71.7	
100.7	88.2	88.2	82.7	82.7	82.7	82.7	77.2	66.1	60.6	
84.3	88.2	88.2	82.7	82.7	82.7	82.7	77.2	66.1	60.6	
67.9	88.2	88.2	82.7	82.7	82.7	82.7	77.2	66.1	60.6	

 (Ust) /  6.6 ft - ZX 6830 - 										
ft	82	98	115	131	148	164	180	197	213	
231.6	177.5	177.5								
226	166.5	166.5	166.5	155.4	166.5	166.5				
215.2	144.4	144.4	144.4	133.4	144.4	144.4	133.4			
209.6	133.4	133.4	133.4	122.4	133.4	133.4	122.4	122.4	122.4	
193.2	100.3	100.3	100.3	89.3	100.3	100.3	100.3	100.3	100.3	
176.8	78.3	78.3	78.3	78.3	67.2	67.2	78.3	89.3	89.3	
160.4	67.2	67.2	67.2	56.2	56.2	56.2	67.2	67.2	67.2	
144	56.2	45.2	45.2	45.2	45.2	45.2	56.2	56.2	56.2	
127.6	45.2	45.2	45.2	45.2	45.2	45.2	34.2	34.2	34.2	
111.2	45.2	45.2	45.2	45.2	45.2	45.2	34.2	23.2	23.2	
94.8	45.2	45.2	45.2	45.2	45.2	45.2	34.2	23.2	23.2	
78.4	45.2	45.2	45.2	45.2	45.2	45.2	34.2	23.2	23.2	
62	45.2	45.2	45.2	45.2	45.2	45.2	34.2	23.2	23.2	

Load curves



		(ft)	56	66	72	82	89	98	105	115	121	131	138	148	154	164	171	180	187	197	203	213	ft
		13.2 USt																					
		6.6 USt																					
213	10 → 62	114 - 122	13.2	12.5	11.2	9.8	8.9	7.9	7.3	6.6	6.6	6.1	5.7	5.2	4.9	4.6	4.3	4	3.8	3.6	3.4	3.2	USt
	10 → 66	118 - 126	13.2	13.2	12	10.4	9.4	8.3	7.7	6.9	6.6	6.4	6	5.5	5.2	4.8	4.6	4.3	4.1	3.9	3.7	3.5	USt P_+
197	10 → 66	122 - 129	13.2	13.2	12.1	10.5	9.6	8.5	7.9	7.1	6.7	6.5	6.1	5.6	5.3	4.9	4.6	4.3	4.1	3.9			USt
	10 → 70	126 - 135	13.2	13.2	12.7	11.1	10.1	9	8.2	7.4	6.9	6.6	6.4	5.9	5.6	5.2	4.9	4.6	4.4	4.2			USt P_+
180	10 → 66	121 - 131	13.2	13.2	11.9	10.3	9.5	8.4	7.8	7	6.6	6.6	6.2	5.8	5.5	5.1	4.9	4.6					USt
	10 → 69	130 - 141	13.2	13.2	12.6	11.1	10.2	9.1	8.4	7.6	7.2	6.6	6.6	6.2	5.9	5.5	5.3	4.9					USt P_+
164	10 → 66	118 - 127	13.2	13.2	11.8	10.2	9.3	8.2	7.6	6.8	6.6	6.4	6	5.6	5.3	4.9							USt
	10 → 68	127 - 138	13.2	13.2	12.4	10.8	9.9	8.8	8.2	7.4	7	6.6	6.6	6.1	5.8	5.4							USt P_+
148	10 → 66	119 - 128	13.2	13.2	11.9	10.2	9.4	8.3	7.6	6.9	6.6	6.4	6.1	5.6									USt
	10 → 69	128 - 138	13.2	13.2	12.5	10.9	10	8.9	8.3	7.5	7	6.6	6.6	6.2									USt P_+
131	10 → 68	125 - 131	13.2	13.2	12.3	10.7	9.8	8.7	8.1	7.3	6.9	6.6											USt
	10 → 71		13.2	13.2	13.1	11.4	10.5	9.3	8.7	7.9	7.4	6.8											USt P_+
115	10 → 66		13.2	13.2	12	10.4	9.5	8.5	7.9	7.1													USt
	10 → 69		13.2	13.2	12.7	11.1	10.2	9.1	8.5	7.7													USt P_+
98	10 → 68		13.2	13.2	12.4	10.8	9.9	8.8															USt
	10 → 72		13.2	13.2	13.1	11.5	10.5	9.4															USt P_+
82	10 → 67		13.2	13.2	12.3	10.7																	USt
	10 → 71		13.2	13.2	13	11.3																	USt P_+

$$USt = USt - 0.58 USt \text{ max.}$$



		(ft)	56	66	72	82	89	98	105	115	121	131	138	148	154	164	171	180	187	197	203	213	ft
		13.2 USt																					
		6.6 USt																					
213	8 → 62	115 - 116	13.2	12.5	11.3	9.8	9	8	7.4	6.6	6.3	5.7	5.3	4.9	4.6	4.2	4	3.7	3.5	3.2	3.1	2.85	USt
	8 → 66	120 - 120	13.2	13.2	12.1	10.5	9.5	8.4	7.8	7	6.5	6	5.6	5.2	4.9	4.5	4.2	3.9	3.7	3.5	3.3	3.1	USt P_+
197	8 → 67	123 - 123	13.2	13.2	12.1	10.5	9.7	8.6	8	7.2	6.7	6.2	5.8	5.3	5	4.6	4.3	4	3.8	3.6			USt
	8 → 70	127 - 128	13.2	13.2	12.8	11.1	10.2	9	8.3	7.5	7	6.4	6.1	5.6	5.3	4.9	4.6	4.3	4.1	3.8			USt P_+
180	8 → 66	122 - 125	13.2	13.2	12	10.4	9.5	8.5	7.9	7.1	6.7	6.2	5.9	5.4	5.2	4.8	4.6	4.2					USt
	8 → 70	131 - 133	13.2	13.2	12.7	11.1	10.3	9.1	8.5	7.7	7.2	6.6	6.4	5.9	5.6	5.2	4.9	4.6					USt P_+
164	8 → 66	119 - 121	13.2	13.2	11.9	10.3	9.4	8.3	7.7	6.9	6.6	6	5.7	5.2	5	4.6							USt
	8 → 68	128 - 130	13.2	13.2	12.5	10.9	10	8.9	8.3	7.5	7	6.6	6.2	5.7	5.5	5.1							USt P_+
148	8 → 66	120 - 122	13.2	13.2	11.9	10.3	9.4	8.3	7.7	6.9	6.6	6.1	5.8	5.3									USt
	8 → 69	129 - 132	13.2	13.2	12.6	11	10.1	9	8.4	7.6	7.1	6.6	6.3	5.8									USt P_+
131	8 → 68	126 - 129	13.2	13.2	12.4	10.8	9.9	8.8	8.2	7.4	6.9	6.5											USt
	8 → 72		13.2	13.2	13.1	11.5	10.5	9.4	8.8	7.9	7.5	6.8											USt P_+
115	8 → 66		13.2	13.2	12	10.5	9.6	8.5	7.9	7.1													USt
	8 → 70		13.2	13.2	12.7	11.2	10.3	9.2	8.5	7.7													USt P_+
98	8 → 68		13.2	13.2	12.5	10.9	10	8.9															USt
	8 → 72		13.2	13.2	13.2	11.5	10.6	9.4															USt P_+
82	8 → 68		13.2	13.2	12.3	10.7																	USt
	8 → 71		13.2	13.2	13.1	11.4																	USt P_+























$$USt = USt - 0.19 USt \text{ max.}$$












Jib weight & counter-jib ballast

	(lb)											
	(+/- 5%)											
				10,141 lb	3,373 lb	(lb)	6,768 lb	3,373 lb	(lb)	CBS - 10,141 lb	CBU - 6,768 lb	CBY - 3,373 lb
213 ft	27,448	26,764	27,613	5	1	54,079	7	2	54,123			
197 ft	26,830	26,169	26,963	5	1	54,079	7	2	54,123			
180 ft	26,147	25,485	26,279	5	0	50,706	7	1	50,750			
164 ft	24,052	23,391	24,185	4	1	43,938	6	1	43,982			
148 ft	24,339	23,678	24,471	4	1	43,938	6	1	43,982			
131 ft	22,245	21,583	22,377	4	0	40,565	6	0	40,609			
115 ft	21,914	21,253	22,046	3	2	37,170	5	1	37,214			
98 ft	20,084	19,423	20,216	3	1	33,797	5	0	33,841			
82 ft	19,004	18,342	19,136	3	0	30,424	4	1	30,446			

Dimensions and weight

Slewing crane part:  213 ft -  50 LVF

Slewing crane part			L (ft)	W (ft)	H (ft)	lb (+/- 5%)
Counter-jib		Ⓐ Ⓑ	36.1 36.1	3.8 3.8	8.1 8.1	19,213 18,629
Cab mast + cab		Ultra View	16.1	7.3	8.2	11,684
Towerhead + Hoisting winch (+ rope)		 6.6 ft 50 LVF	16.9	8.2	9.1	18,684
Towerhead		 6.6 ft	9.3	8.1	8.1	11,684
Hoisting winch (+ rope)		90 HPL™ 100 LVF	14 14	7.5 7.5	7.6 7.6	9,921 10,913
Jib section		① 6 DVF	35.5	5.6	8.9	7,760
Jib section		② ④ ⑤ ⑥	33.8 33.5 33.6 33.4	3.9 3.9 3.9 3.9	7.9 7.8 6.9 6	5,335 3,439 2,723 1,753
jib section		③ ⑦ ⑧	17.3 16.7 16.7	3.9 3.9 3.9	7.8 5 4.6	2,116 683 485
Trolley		 13.2 USt	6.1	5	3.4	882
Pulley block		 13.2 USt	3.9	1.4	7.6	1,003
Trolley		 13.2 USt	5.2	5	3.2	463
Trolley		 13.2 USt  6.6 USt	5.6 6.1	5 5	3.4 3.2	540 520
Trolley		 13.2 USt  6.6 USt	5.4 3.6	0.7 0.9	5.8 5.3	992 584


Crane tower			L (ft)	W (ft)	H (ft)	lb (+/- 5%)
Telescopic cage T 61		▧ 6.6 ft	35.5	13.6	14.7	21,385
K 649B KM 649E		▧ 6.6 ft	33.6 33.8	6.8 6.7	6.7 6.7	11,663 10,692
KR 649A KRMT 649A K 649A KMT 649A		▧ 6.6 ft	17.2 17.2 17.2 17.2	6.9 6.9 6.8 6.8	6.8 6.8 6.7 6.7	7,165 6,724 6,184 5,666
K 649C KRMT 649C		▧ 6.6 ft	11.7 11.7	6.8 6.9	6.7 6.8	4,376 5,401
Fixing angles		P 602B	2.1	2.1	4.2	650
Basic mast unit		V 60A V 63A	16.4 32.9	7.9 7.9	7.9 7.9	9,674 16,502
Struts		V 60A V 63A	14.8 14.8	1 1.1	1 1.1	919 1,135
Half-bearer		V 60A V 63A	22 22	2.3 2.3	7.6 7.6	3,519 4,079
Cross girder		ZD 463	25.1	3.8	4.5	7,904
1/2 Cross girder		ZD 463	11.2	2.3	4.4	3,649
Cross girder		ZX 6830	29.9 29.9	2.5 3.7	4.9 3.6	12,004 11,607

Mechanisms


480 V - 60 Hz											hp	kW			
	50 LVF 30 Optima	fpm	105	135	185	267	54	71	97	135	50	37	1,106 ft		
		USt	6.6	5	3.3	1.1	13.2	9.9	6.6	2.5					
	100 LVF 30 Optima	fpm	202	259	346	448	533	105	136	180	235	267	100	75	3,087 ft
		USt	6.6	5	3.3	1.7	0.8	13.2	9.9	6.6	3.3	2.5			
	90 HPL™ 30	fpm	174	226	320	541	722	90	118	171	305	361	90	66	2,772 ft
		USt	6.6	5	3.3	1.7	0.8	13.2	9.9	6.6	3.3	2.5			
	6 DVF 4 Optima	fpm	0 → 164 (13.2 USt) 0 → 328 (6.6 USt) 0 → 394 (3.3 USt)									5.5	4		
	RVF 162 Optima+	rpm	0 → 0.9									2 x 7.5	2 x 5.5		

IEC 60204-32	kVA	
480 V (+6% -10%) 60 Hz	50 LVF: 58 → 38 kVA 100 LVF: 98 → 58 kVA 90 HPL™: 90 → 54 kVA	

50 LVF 30 Optima



100 LVF 30 Optima



These mast combinations meet the EN 14439 and ASME B30.3-2012 specifications for "out of service" wind conditions, provided the illustrated wind speed matches required design wind for the location of the tower crane. The "out of service" design wind speed was determined in accordance with ASCE 7-10, Figure 26.5-A. The wind velocity, used for this configuration was 98 mph (158 kph), which represents a nominal design 3-second wind gust at 33 ft (10 m) above ground for Exposure B category A. Factor of 0.85 was applied to the 50-year ultimate design wind speed of 115 mph (185 kph), per ASCE 37-02, with the assumption that this crane is considered a temporary structure used during a construction period of 2 years or less.

	Jib elevation		Total ballast weight		Travelling
	Standard equipment		Jib weight		Required power
	Options		Lorry 44 ft		Power Control Function: winch speeds adapted to the available power
	Potain Plus function: Plus load curves		Container High Cube 40 ft, and/or Flat Rack 20 ft		Consult us
	Hook heights with Plus load curves				
	Reactions in service				
	Reactions out of service				



This commercial document is not legally binding. For any technical information, please refer to the corresponding instructions.



© 2018 The Manitowoc Company, Inc.
www.manitowoc.com

Ref. 02D_ASCEUSt_MDT269J12_2015_47-3